




UP-PANELS

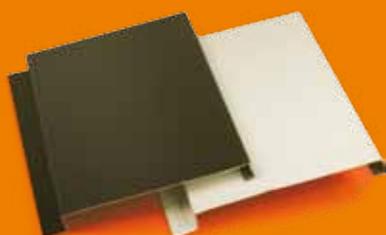


A wide range of colours

High quality

Easy to install

Easy-care

Office in Tallinn, Estonia

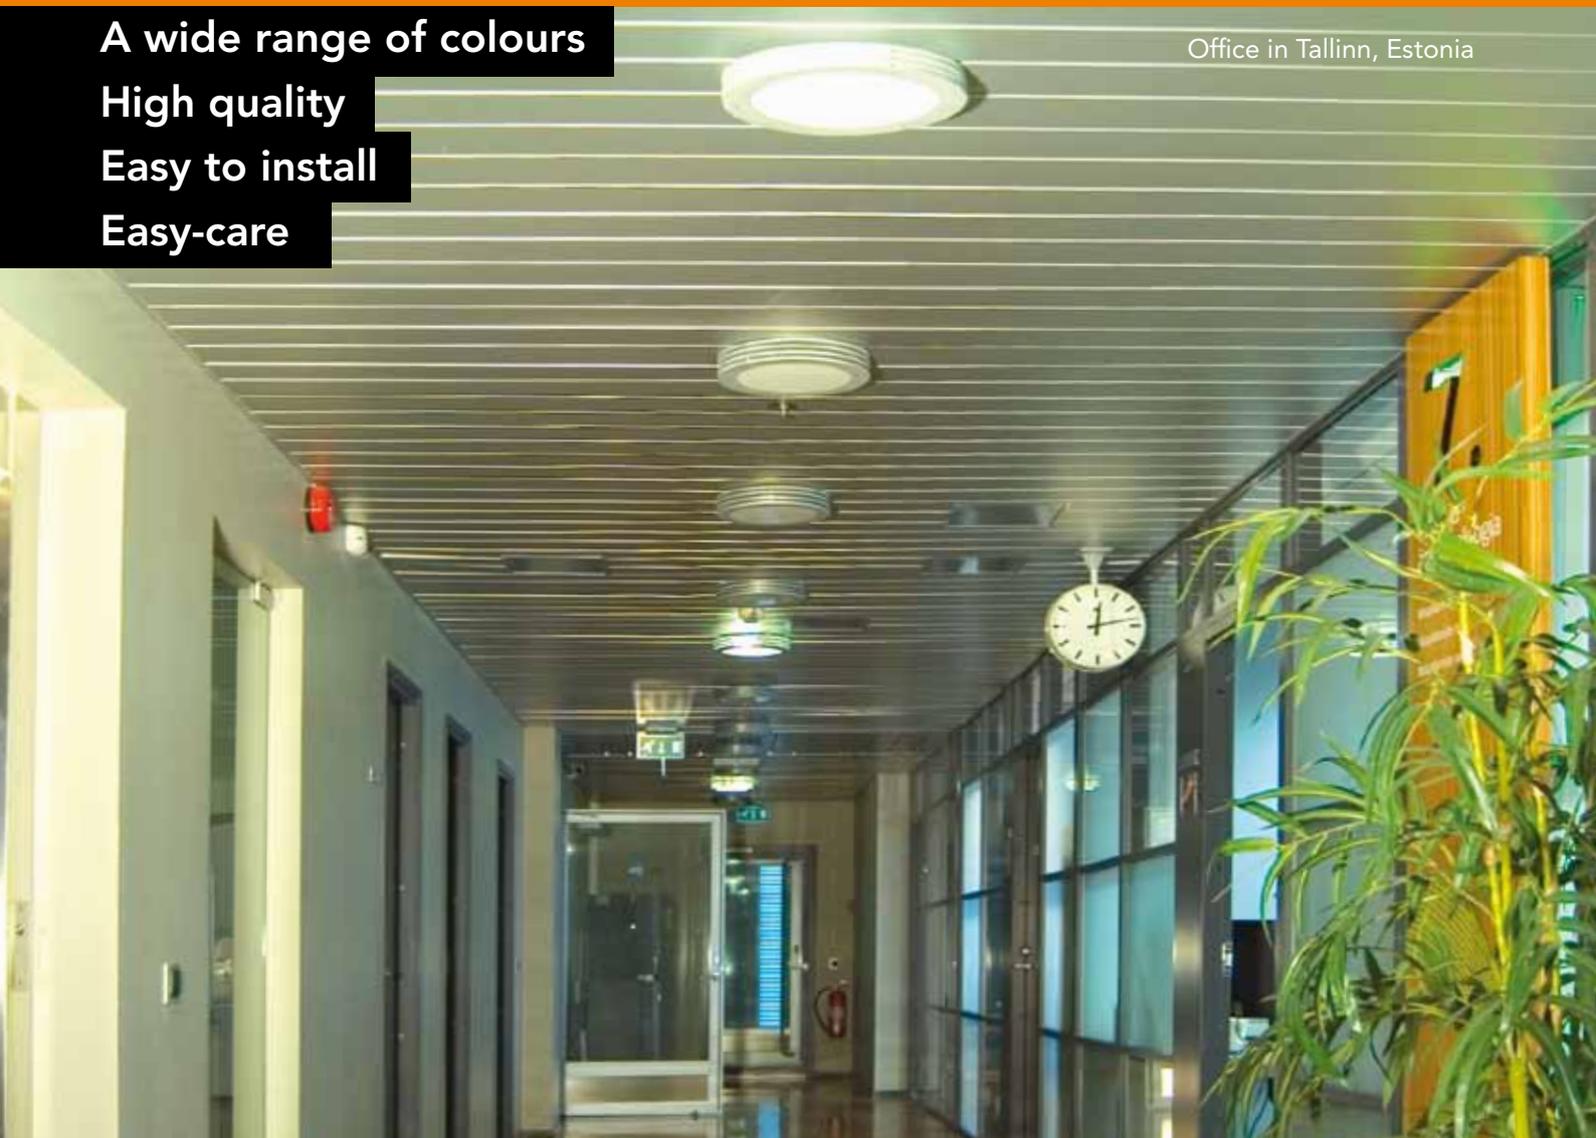

profiline

UP-PANELS

profiline



Aluminium suspended ceilings made from PROFILINE UP-panels are ceilings with spaces between the panels. The ceilings can be opened after installation.

PROFILINE aluminium suspended ceilings are integrated systems that comprise ceiling panels as well as suspension and fastening details.

Moldings and acoustic filling materials can be ordered separately.

The suspension structure consists of carriers and hangers. When installing the panels, their position should be fixed with the embedding clip on the carrier.


Surface coating

White matt polyester paint. All colour tones can be ordered based on the RAL colour chart.

	Width B (mm)	Height H (mm)	Spaces between panels A (mm)	Length (mm)*	Thickness of the material (mm)	Carrier	Consumption rate**			
							Panel (m)	Hanger RKV 100 + RS (pcs)	Molding (m)	Carrier (m)
UP 90	90	15	10	6000	0.49	JK 90/10	10.00	0.9	1.0	0.9
UP 140	140	15	10	6000	0.49	JK 140/10	6.67	0.9	1.0	0.9

*Non-standard lengths available at special order.

**Wasteless material consumption per square metre in a quadrangular room, i.e. the standard consumption rate.

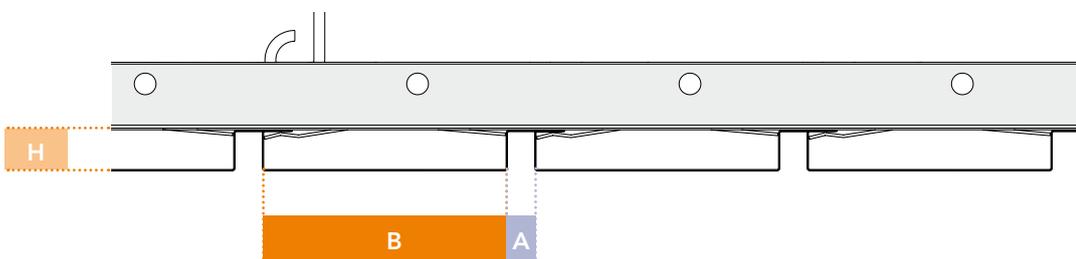


Hanger

RKV 100 suspension wire with a hook and a spring, length 100 mm, Ø 4 mm; and RS suspension wire with an eye, length 125–3000 mm, eye Ø 6 mm.

Panel

Angle molding

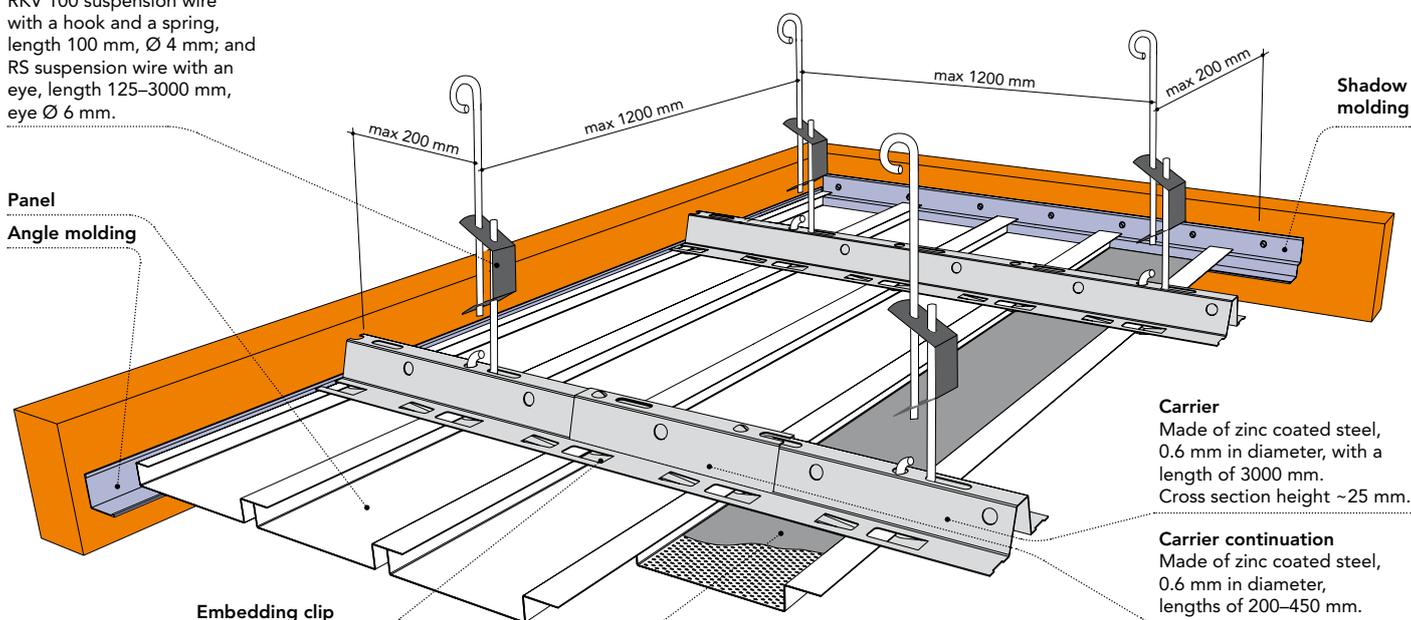

Shadow molding

Carrier

Made of zinc coated steel, 0.6 mm in diameter, with a length of 3000 mm. Cross section height ~25 mm.

Carrier continuation

Made of zinc coated steel, 0.6 mm in diameter, lengths of 200–450 mm.

Embedding clip

Acoustic filling material

Acoustic fabric or acoustic wool for perforated panels.

Slip-on molding

