

Declaration of Performance

Nr 01-002

1. Unique identification code of the product type
Profiline steel profiles, material thickness 0.55 (Appendix 1)
2. Type, batch or serial number or any other element allowing identification of the product
Product name and date of manufacture: on the product or on the product packaging
3. Intended use of the product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer
Metal framing components for gypsum board systems
4. Declared performance
FAVOR AS Loovälja tee 11 74207 Liivamäe küla Jõelähtme vald Harjumaa Estonia
5. Authorized representative
Not applicable
6. System of assessment and verification of constant performance of the product
System 4
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard
Initial type-testing of the product and factory production control performed by manufacturer according to standard EN 14195:2014
8. European technical assessment
Not applicable

9. Declared performance

| Essential characteristics | Performance | Harmonised technical specification |
|---------------------------|----------------|------------------------------------|
| Reaction to fire | A1 | EN 14195:2014 96/603/EC |
| Material | Steel DX51D +Z | EN 10346:2015 EN 10143:2006 |
| Tensile strength | 270-500 MPa | EN 10346:2015 |

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Liivamäe, 27.08.2020


 Vaido Lainelo
 Member of the Board




Appendix 1

| | Item | Dimensions mm |
|-----------|------------|-------------------|
| STUDS | VP 42/35 | C / 35 / 42 / 35 |
| | VP 66/35 | C / 35 / 66 / 35 |
| | VP 70/35 | C / 35 / 70 / 35 |
| | VP 95/35 | C / 35 / 95 / 35 |
| | VP 42/40 | C / 38 / 42 / 40 |
| | VP 66/40 | C / 38 / 66 / 40 |
| | VP 70/40 | C / 38 / 70 / 40 |
| | VP 95/40 | C / 38 / 95 / 40 |
| | VP 120/40 | C / 38 / 120 / 40 |
| | AVP 66/40 | C / 38 / 66 / 40 |
| | AVP 70/40 | C / 38 / 70 / 40 |
| | AVP 75/40 | C / 38 / 75 / 40 |
| | AVP 95/40 | C / 38 / 95 / 40 |
| | AVP 100/40 | C / 38 / 100 / 40 |
| | AVP 120/40 | C / 38 / 120 / 40 |
| | AR 66/40 | C / 38 / 66 / 40 |
| | AR 70/40 | C / 38 / 70 / 40 |
| | AR 75/40 | C / 38 / 75 / 40 |
| | AR 95/40 | C / 38 / 95 / 40 |
| | AR 100/40 | C / 39 / 100 / 40 |
| | AR 120/40 | C / 38 / 120 / 40 |
| | CW 50/50 | C / 48 / 50 / 50 |
| | CW 75/50 | C / 48 / 75 / 50 |
| | CW 100/50 | C / 48 / 100 / 50 |
| | LPR 42/40 | C / 38 / 42 / 40 |
| | LPR 66/40 | C / 38 / 66 / 40 |
| | LPR 70/40 | C / 38 / 70 / 40 |
| | LPR 95/40 | C / 38 / 95 / 40 |
| | LPR 120/40 | C / 38 / 120 / 40 |
| | LPR 50/50 | C / 48 / 50 / 50 |
| | LPR 75/50 | C / 48 / 75 / 50 |
| | LPR 100/50 | C / 48 / 100 / 50 |
| | RUNNERS | HP 42/30 |
| HP 66/30 | | U / 30 / 66 / 30 |
| HP 70/30 | | U / 30 / 70 / 30 |
| HP 95/30 | | U / 30 / 95 / 30 |
| HP 42/37 | | U / 37 / 42 / 37 |
| HP 66/37 | | U / 37 / 66 / 37 |
| HP 70/37 | | U / 37 / 70 / 37 |
| HP 95/37 | | U / 37 / 95 / 37 |
| HP 120/37 | | U / 37 / 120 / 37 |
| HP 42/40 | | U / 40 / 42 / 40 |
| HP 66/40 | | U / 40 / 66 / 40 |
| HP 70/40 | | U / 40 / 70 / 40 |
| HP 95/40 | | U / 40 / 95 / 40 |
| HP 120/40 | | U / 40 / 120 / 40 |
| HP 42/58 | | U / 58 / 42 / 58 |
| HP 66/58 | | U / 58 / 66 / 58 |
| HP 70/58 | | U / 58 / 70 / 58 |
| HP 95/58 | | U / 58 / 95 / 58 |
| HP 120/58 | | U / 58 / 120 / 58 |



| | Item | Dimensions mm |
|-----------------|-----------|----------------------------|
| RUNNERS | UW 50/30 | U / 30 / 50 / 30 |
| | UW 75/30 | U / 30 / 75 / 30 |
| | UW 100/30 | U / 30 / 100 / 30 |
| | UW 50/37 | U / 37 / 50 / 37 |
| | UW 75/37 | U / 37 / 75 / 37 |
| | UW 100/37 | U / 37 / 100 / 37 |
| | UW 50/58 | U / 58 / 50 / 58 |
| | UW 75/58 | U / 58 / 75 / 58 |
| | UW 100/58 | U / 58 / 100 / 58 |
| | SK 42/37 | U / 37 / 42 / 37 |
| | SK 66/37 | U / 37 / 66 / 37 |
| | SK 70/37 | U / 37 / 70 / 37 |
| | SK 95/37 | U / 37 / 95 / 37 |
| | SK 120/37 | U / 37 / 120 / 37 |
| | SK 42/40 | U / 40 / 42 / 40 |
| | SK 66/40 | U / 40 / 66 / 40 |
| | SK 70/40 | U / 40 / 70 / 40 |
| | SK 95/40 | U / 40 / 95 / 40 |
| | SK 120/40 | U / 40 / 120 / 40 |
| | SK 42/58 | U / 58 / 42 / 58 |
| | SK 66/58 | U / 58 / 66 / 58 |
| | SK 70/58 | U / 58 / 70 / 58 |
| | SK 95/58 | U / 58 / 95 / 58 |
| | SK 120/58 | U / 58 / 120 / 58 |
| | SK 50/30 | U / 30 / 50 / 30 |
| | SK 75/30 | U / 30 / 75 / 30 |
| | SK 100/30 | U / 30 / 100 / 30 |
| | SK 50/37 | U / 37 / 50 / 37 |
| | SK 75/37 | U / 37 / 75 / 37 |
| | SK 100/37 | U / 37 / 100 / 37 |
| | SK 50/58 | U / 58 / 50 / 58 |
| | SK 75/58 | U / 58 / 75 / 58 |
| | SK 100/58 | U / 58 / 100 / 58 |
| HAT PROFILES | MP 16 | W / 15 / 16 / 50 / 16 / 15 |
| | MP 27 | W / 15 / 27 / 38 / 27 / 15 |
| | S-HL 16 | W / 15 / 16 / 50 / 16 / 15 |
| | S-HL 27 | W / 15 / 27 / 38 / 27 / 15 |
| | AMP 16 | W / 15 / 16 / 50 / 14 |
| | AMP 27 | W / 15 / 27 / 38 / 25 |
| | AP 16 | W / 15 / 16 / 50 / 14 |
| | AP 27 | W / 15 / 27 / 38 / 25 |
| CD-PROFILES | CD60 | C / 27 / 60 / 27 |
| | GK 60 | C / 27 / 60 / 27 |
| UD-PROFILES | UD 28 | U / 27 / 28 / 27 |
| | GK-UD 28 | U / 27 / 28 / 27 |
| CORNER PROFILES | L 10/30 | L / 10 / 30 |
| | L 30/30 | L / 30 / 30 |
| | L 30/40 | L / 30 / 40 |
| | L 50/50 | L / 50 / 50 |
| | LP 50/50 | L / 50 / 50 |
| | PRR 100 | L / 100 / 10000 |

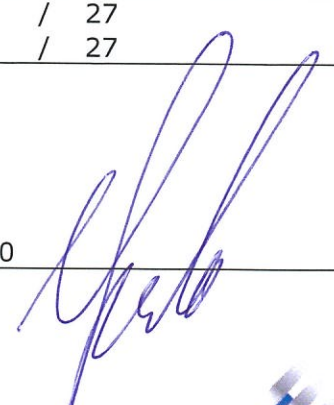


| | Item | Dimensions mm |
|-------------|------|------------------|
| J- PROFILES | J 13 | L / 13 / 14 / 30 |
| | J 16 | L / 13 / 17 / 30 |
| | J 26 | L / 13 / 27 / 30 |
| | J 28 | L / 13 / 28 / 30 |

