

# Declaration of Performance

## Nr 01-003

1. Unique identification code of the product type  
**Profiline steel profiles, material thickness 0.50 (Appendix 1)**
2. Type, batch or serial number or any other element allowing identification of the product  
**Product name and date of manufacture: on the product or on the product packaging**
3. Intended use of the product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer  
**Metal framing components for gypsum board systems**
4. Declared performance  
**FAVOR AS Loovälja tee 11 74207 Liivamäe küla Jõelähtme vald Harjumaa Estonia**
5. Authorized representative  
**Not applicable**
6. System of assessment and verification of constant performance of the product  
**System 4**
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard  
**Initial type-testing of the product and factory production control performed by manufacturer according to standard EN 14195:2014**

8. European technical assessment  
**Not applicable**

9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	A1	EN 14195:2014 96/603/EC
Material	Steel DX51D +Z	EN 10346:2015 EN 10143:2006
Tensile strength	270-500 MPa	EN 10346:2015

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:


Liivamäe, 27.08.2020

Vaido Lainelo  
Member of the Board




Appendix 1

	Item	Dimensions mm
STUDS	VP 42/35	C / 35 / 42 / 35
	VP 66/35	C / 35 / 66 / 35
	VP 70/35	C / 35 / 70 / 35
	VP 95/35	C / 35 / 95 / 35
	VP 42/40	C / 38 / 42 / 40
	VP 66/40	C / 38 / 66 / 40
	VP 70/40	C / 38 / 70 / 40
	VP 95/40	C / 38 / 95 / 40
	VP 120/40	C / 38 / 120 / 40
	AVP 66/40	C / 38 / 66 / 40
	AVP 70/40	C / 38 / 70 / 40
	AVP 75/40	C / 38 / 75 / 40
	AVP 95/40	C / 38 / 95 / 40
	AVP 100/40	C / 38 / 100 / 40
	AVP 120/40	C / 38 / 120 / 40
	AR 66/40	C / 38 / 66 / 40
	AR 70/40	C / 38 / 70 / 40
	AR 75/40	C / 38 / 75 / 40
	AR 95/40	C / 38 / 95 / 40
	AR 100/40	C / 39 / 100 / 40
	AR 120/40	C / 38 / 120 / 40
	CW 50/50	C / 48 / 50 / 50
	CW 75/50	C / 48 / 75 / 50
	CW 100/50	C / 48 / 100 / 50
	LPR 42/40	C / 38 / 42 / 40
	LPR 66/40	C / 38 / 66 / 40
	LPR 70/40	C / 38 / 70 / 40
	LPR 95/40	C / 38 / 95 / 40
	LPR 120/40	C / 38 / 120 / 40
	LPR 50/50	C / 48 / 50 / 50
	LPR 75/50	C / 48 / 75 / 50
	LPR 100/50	C / 48 / 100 / 50
	RUNNERS	HP 42/30
HP 66/30		U / 30 / 66 / 30
HP 70/30		U / 30 / 70 / 30
HP 95/30		U / 30 / 95 / 30
HP 42/37		U / 37 / 42 / 37
HP 66/37		U / 37 / 66 / 37
HP 70/37		U / 37 / 70 / 37
HP 95/37		U / 37 / 95 / 37
HP 120/37		U / 37 / 120 / 37
HP 42/40		U / 40 / 42 / 40
HP 66/40		U / 40 / 66 / 40
HP 70/40		U / 40 / 70 / 40
HP 95/40		U / 40 / 95 / 40
HP 120/40		U / 40 / 120 / 40
HP 42/58		U / 58 / 42 / 58
HP 66/58		U / 58 / 66 / 58
HP 70/58		U / 58 / 70 / 58
HP 95/58		U / 58 / 95 / 58
HP 120/58		U / 58 / 120 / 58

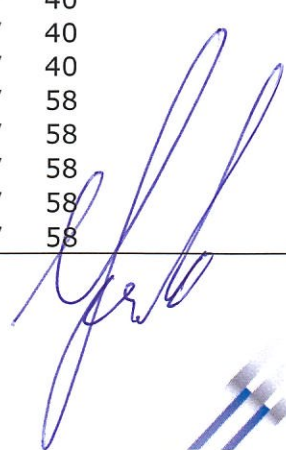


	Item	Dimensions mm
RUNNERS	UW 50/30	U / 30 / 50 / 30
	UW 75/30	U / 30 / 75 / 30
	UW 100/30	U / 30 / 100 / 30
	UW 50/37	U / 37 / 50 / 37
	UW 75/37	U / 37 / 75 / 37
	UW 100/37	U / 37 / 100 / 37
	UW 50/58	U / 58 / 50 / 58
	UW 75/58	U / 58 / 75 / 58
	UW 100/58	U / 58 / 100 / 58
	SK 42/37	U / 37 / 42 / 37
	SK 66/37	U / 37 / 66 / 37
	SK 70/37	U / 37 / 70 / 37
	SK 95/37	U / 37 / 95 / 37
	SK 120/37	U / 37 / 120 / 37
	SK 42/40	U / 40 / 42 / 40
	SK 66/40	U / 40 / 66 / 40
	SK 70/40	U / 40 / 70 / 40
	SK 95/40	U / 40 / 95 / 40
	SK 120/40	U / 40 / 120 / 40
	SK 42/58	U / 58 / 42 / 58
	SK 66/58	U / 58 / 66 / 58
	SK 70/58	U / 58 / 70 / 58
	SK 95/58	U / 58 / 95 / 58
	SK 120/58	U / 58 / 120 / 58
	SK 50/30	U / 30 / 50 / 30
	SK 75/30	U / 30 / 75 / 30
	SK 100/30	U / 30 / 100 / 30
	SK 50/37	U / 37 / 50 / 37
	SK 75/37	U / 37 / 75 / 37
	SK 100/37	U / 37 / 100 / 37
	SK 50/58	U / 58 / 50 / 58
	SK 75/58	U / 58 / 75 / 58
	SK 100/58	U / 58 / 100 / 58
HAT PROFILES	MP 16	W / 15 / 16 / 50 / 16 / 15
	MP 27	W / 15 / 27 / 38 / 27 / 15
	S-HL 16	W / 15 / 16 / 50 / 16 / 15
	S-HL 27	W / 15 / 27 / 38 / 27 / 15
	AMP 16	W / 15 / 16 / 50 / 14
	AMP 27	W / 15 / 27 / 38 / 25
	AP 16	W / 15 / 16 / 50 / 14
	AP 27	W / 15 / 27 / 38 / 25
CD-PROFILES	CD60	C / 27 / 60 / 27
	GK 60	C / 27 / 60 / 27
UD-PROFILES	UD 28	U / 27 / 28 / 27
	GK-UD 28	U / 27 / 28 / 27
CORNER PROFILES	L 10/30	L / 10 / 30
	L 30/30	L / 30 / 30
	L 30/40	L / 30 / 40
	L 50/50	L / 50 / 50
	LP 50/50	L / 50 / 50
	PRR 100	L / 100 / 10000

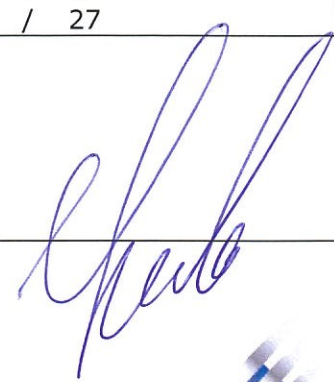


	Item	Dimensions mm						
J- PROFILES	J 13	L	/	13	/	14	/	30
	J 16	L	/	13	/	17	/	30
	J 26	L	/	13	/	27	/	30
	J 28	L	/	13	/	28	/	30

